

150mA High Voltage Regulator

General Description

The WR0115 series is a set of low power high voltage regulators implemented in CMOS technology which can provide 150mA output current. The device allows input voltage as high as 40V. The WR0115 series is available in several fixed output voltages.

Although designed primarily as fixed voltage regulators, the device can be used with external components to obtain variable output voltages.

The WR0115 series is available in Green SOT23-3, SOT23-5/L and SOT89-3/L packages. It operates over an ambient temperature range of -40°C to +85°C.


Feature

- Low Power Consumption
- 150mA Nominal Output Current
- Low Dropout Voltage
- Low Temperature Coefficient
- High Input Voltage (up to 40V)
- Output Voltage Accuracy: $\pm 3\%$
- Fixed Output Voltage Versions: 0.8V to 4.7V with 0.1V per Step 5V to 12V with 0.25V per Step
- -40°C to +85°C Operating Temperature Range
- Available in Green SOT23-3, SOT23-5/L and SOT89-3/L Packages

Applications


- Battery-Powered Equipment
- Communication Equipment
- Audio/Video Equipment

Typical Application

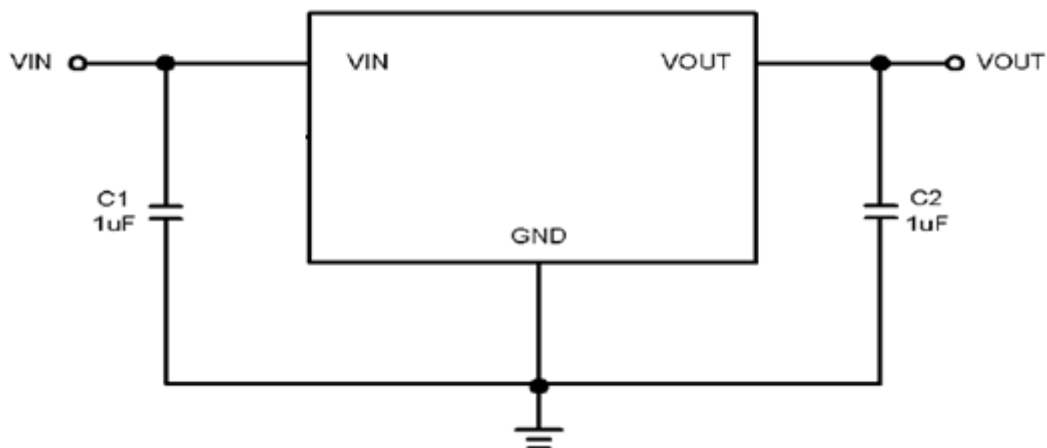


Pin Configuration


(Top View)



SOT23-3



SOT23-5/L



SOT89-3/L

Pin Description

Pin Number					Pin Name	Description
SOT23-3	SOT23-5L	SOT23-5	SOT89-3	SOT89-3L		
1	1	2	2	1	GND	Ground
2	3	5	1	3	OUT	Regulator Output
3	2	1	3	2	IN	Regulator Input
-	4,5	3,4	-	-	NC	Not connect

Absolute Maximum Ratings

Parameter		Rating	Unit
Input voltage range		-0.3 ~ 44	V
Output voltage range		-0.3 ~ 6	V
Power Dissipation $P_D @ T_A=25^\circ\text{C}$	SOT23-3	500	mW
	SOT23-5/L	500	mW
	SOT89-3/L	625	mW
Thermal Resistance, θ_{JA}	SOT23-3	250	$^\circ\text{C/W}$
	SOT23-5/L	250	$^\circ\text{C/W}$
	SOT89-3/L	200	$^\circ\text{C/W}$
Operating Junction Temperature		150	$^\circ\text{C}$
Lead Temperature Range		260	$^\circ\text{C}$
Storage Temperature Range		-65 ~ 150	$^\circ\text{C}$
ESD Susceptibility	HBM	± 4000	V

Recommended Operating Conditions

Parameter	Rating	Unit
Operating Supply voltage	2.7 ~ 40	V
Operating Temperature Range	-40~+85	$^\circ\text{C}$

WR0115

Electrical Characteristics

($V_{IN} = V_{OUT} + 2V$ or $4V$, whichever is greater, $C_{IN} = C_{OUT} = 1\mu F$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)







symbol	Parameter	Test Condition		Temp	Min	Typ	Max	Unit
V_{IN}	Input Voltage	$V_{OUT} < 3.3V$		Full	2.7		36	V
		$V_{OUT} \geq 3.3V$		Full	2.7		40	
V_{OUT}	Output Voltage	$I_{OUT} = 1mA$		$+25^{\circ}C$	0.97 V_{OUT}	V_{OUT}	1.03 V_{OUT}	V
I_{OUT}	Maximum Output Current ¹			$+25^{\circ}C$	150			mA
V_{DO}	Dropout Voltage ²	$I_{OUT} = 150mA, V_{OUT} \geq 2.5V$		$+25^{\circ}C$		1100	1850	mV
				Full			2000	
LNR	Line Regulation	$V_{IN} = V_{OUT} + 2V$ or $4V$ to $32V, I_{OUT} = 1mA$	$V_{OUT} < 3.3V$	$+25^{\circ}C$		0.01		%V
		$V_{IN} = V_{OUT} + 2V$ or $4V$ to $40V, I_{OUT} = 1mA$	$V_{OUT} \geq 3.3V$	$+25^{\circ}C$		0.01		
LDR	Load Regulation ³	$V_{IN} = V_{OUT} + 2V$ or $4V, I_{OUT} = 1mA$ to $150mA$		$+25^{\circ}C$		5		mV
IQ	Ground Pin Current	No load		$+25^{\circ}C$		3.5	5.5	uA
		$I_{OUT} = 1mA$		$+25^{\circ}C$		3.5		
$\frac{\Delta V_{OUT}}{\Delta T_A \times V_{OUT}}$	Output Voltage Temperature Coefficient ⁴	$I_{OUT} = 1mA$		Full		53		ppm/ $^{\circ}C$
PSRR	Power Supply Rejection Ratio	$V_{OUT} = 3.3V, I_{OUT} = 10mA$	$f = 217Hz$	$+25^{\circ}C$		60		dB
			$f = 1kHz$	$+25^{\circ}C$		45		
T_{SD}	Thermal Shutdown Temperature					145		$^{\circ}C$
ΔT_{SD}	Thermal Shutdown Hysteresis					20		$^{\circ}C$


Note1: Maximum output current is affected by the PCB layout, size of metal trace, the thermal conduction path between metal layers, ambient temperature and the other environment factors of system. Attention should be paid to the dropout voltage when $V_{IN} < V_{OUT} + V_{drop}$.

Note2: The dropout voltage is defined as $V_{IN} - V_{OUT}$, when V_{OUT} is 95% of the value of V_{OUT} for $V_{IN} = V_{OUT} + 2V$.


Note3: The Load regulation is measured using pulse technique with duty cycle $< 5\%$.

Note4: Output voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.

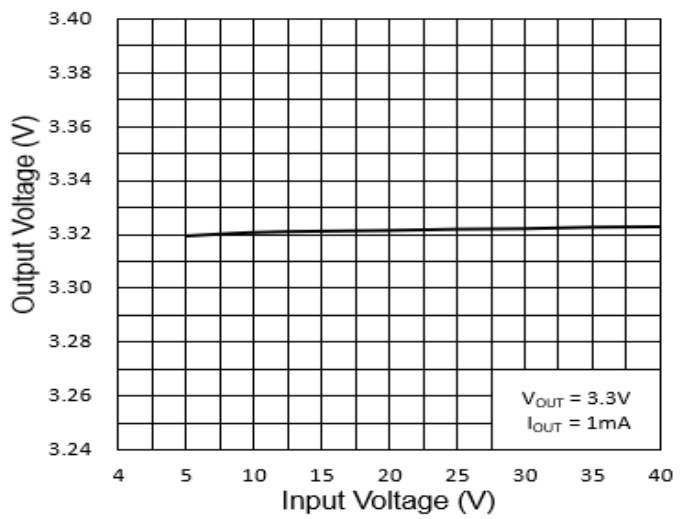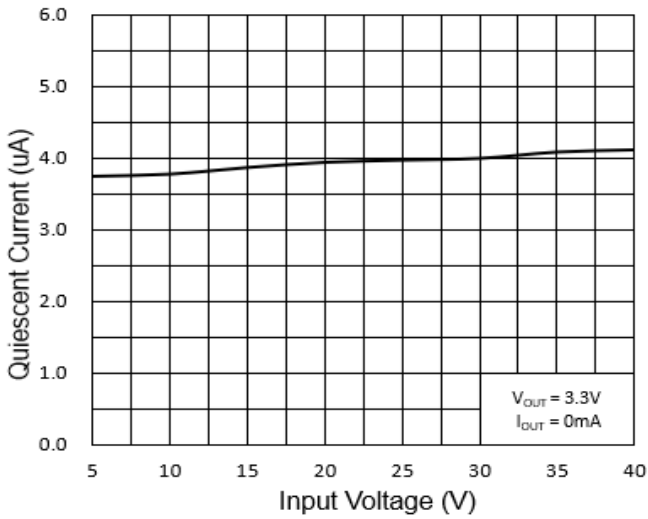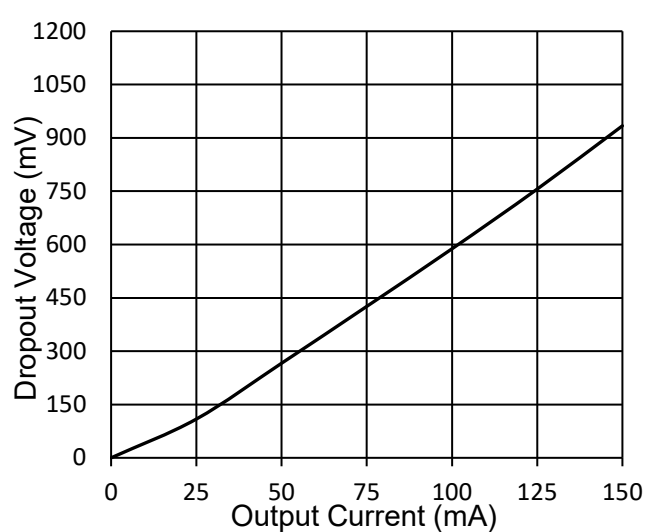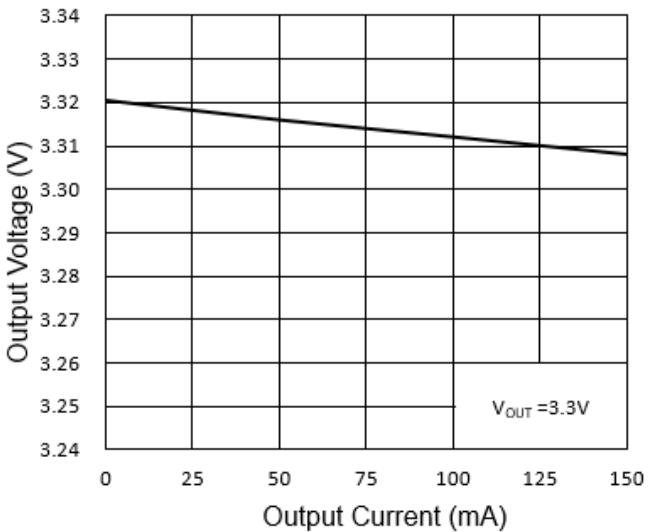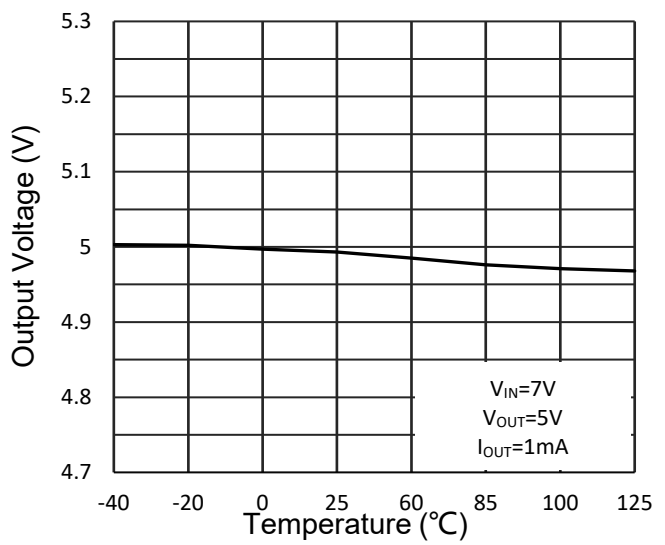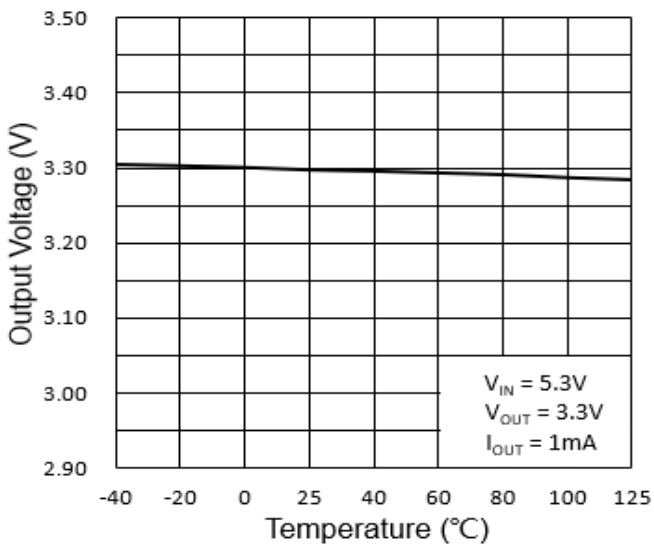
Typical Characteristics ($T_a=25^\circ\text{C}$, $V_{IN}=V_{OUT}+2\text{V}$, $C_{IN}=C_{OUT}=1\mu\text{F}$, unless otherwise noted)

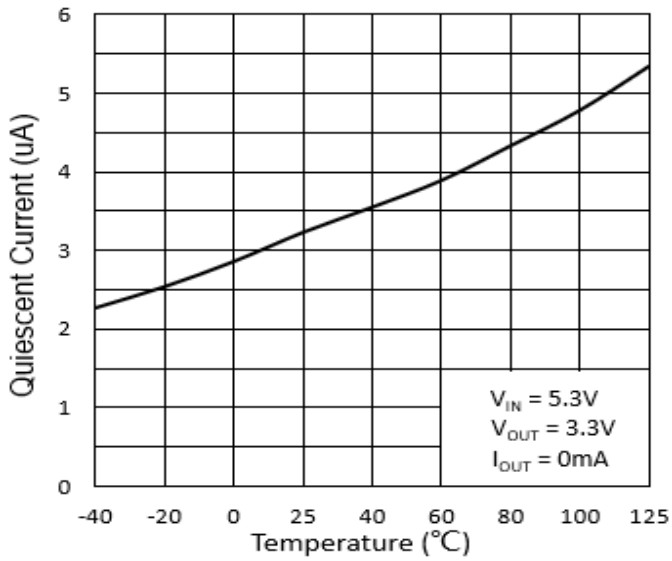Quiescent Current vs. Supply Voltage
Output Voltage vs. Supply Voltage

Output Voltage vs. Output Current
Dropout Voltage vs. Output Current

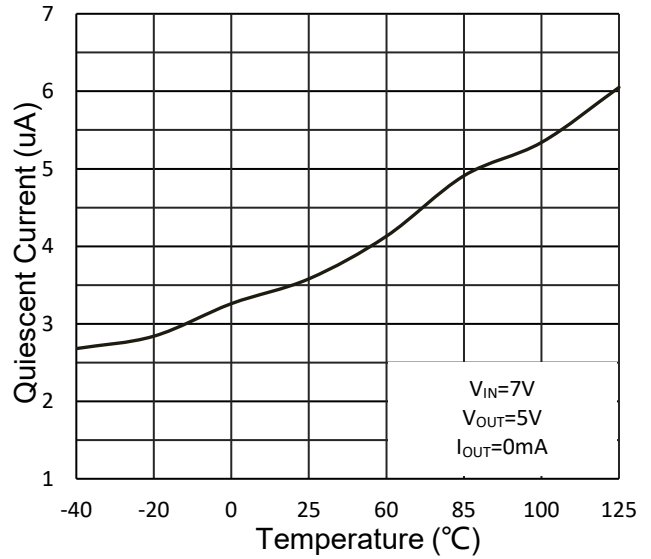Output Voltage vs. Temperature
Output Voltage vs. Temperature

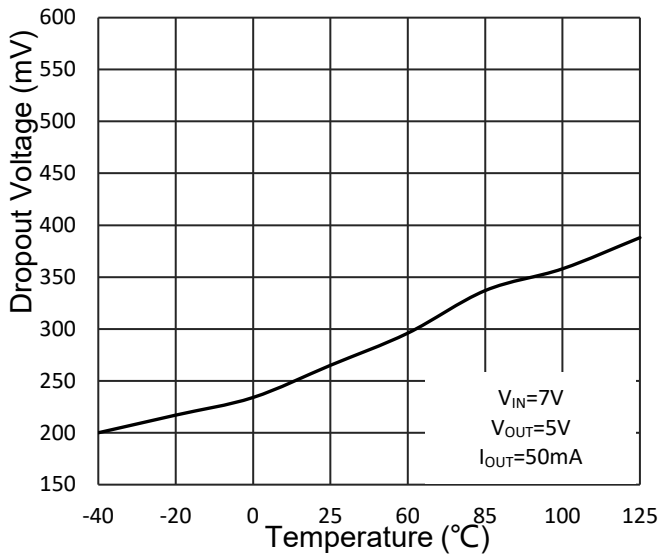


Quiescent Current vs. Temperature




Quiescent Current vs. Temperature




Dropout Voltage vs. Temperature

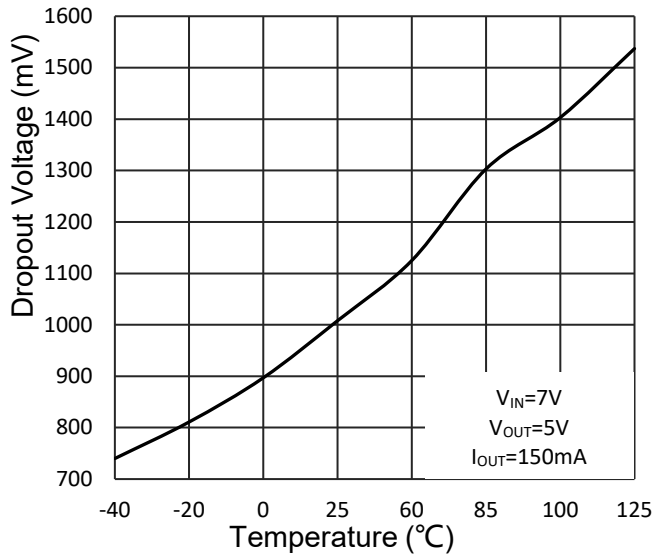


Dropout Voltage vs. Temperature

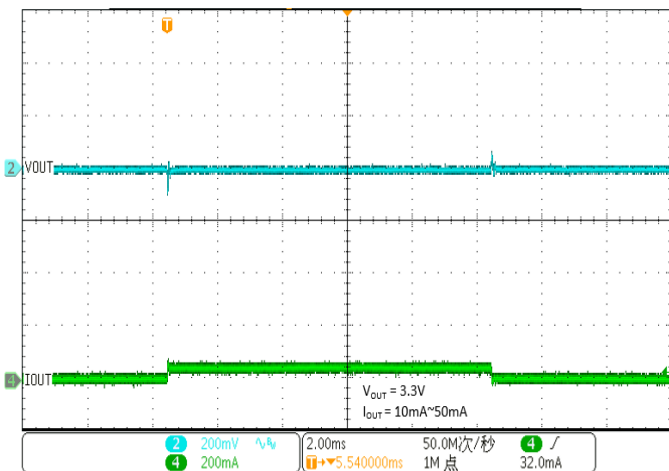


Load-Transient Response

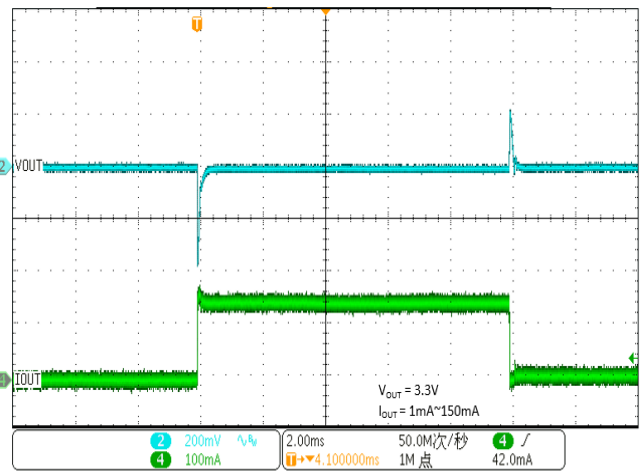


Load-Transient Response

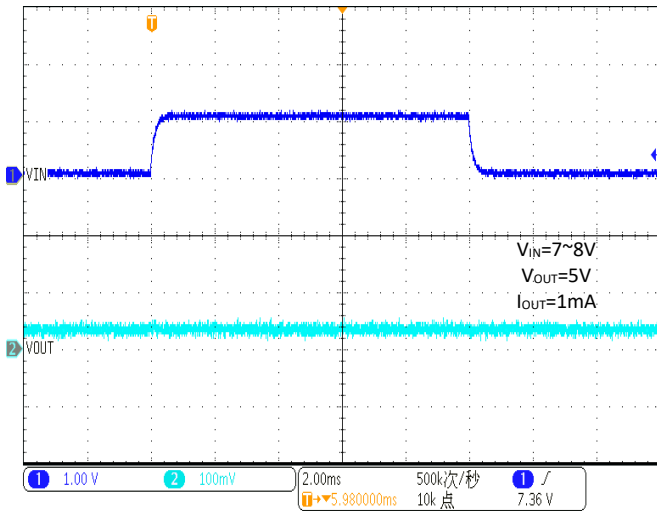


Line-Transient Response

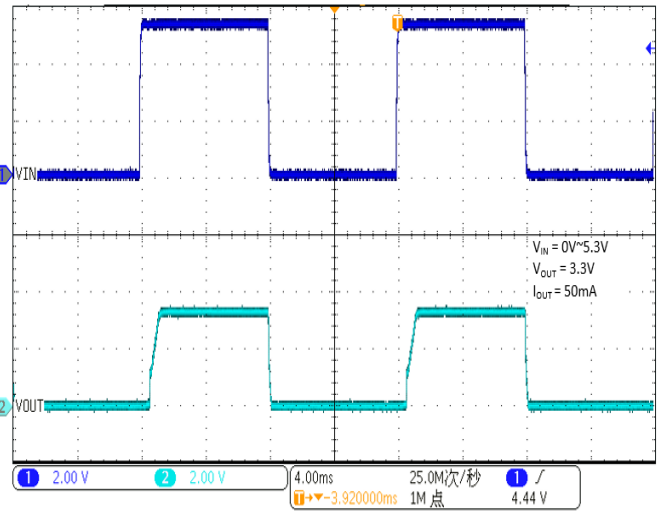


Power-Up/Power-Down Output Waveform

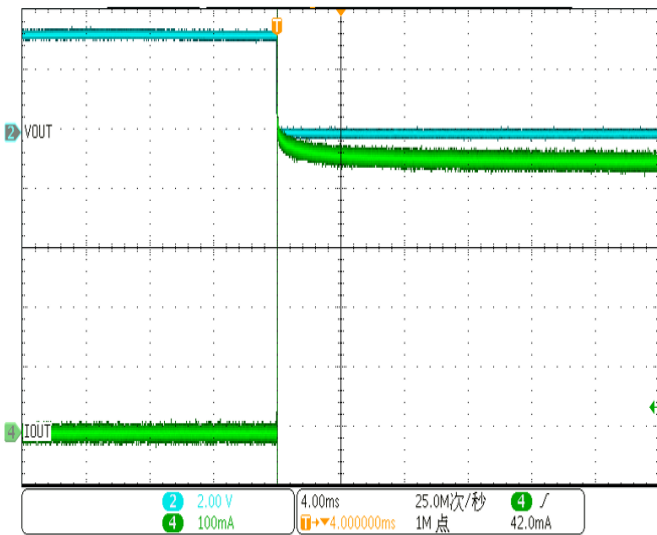


Output short Waveform

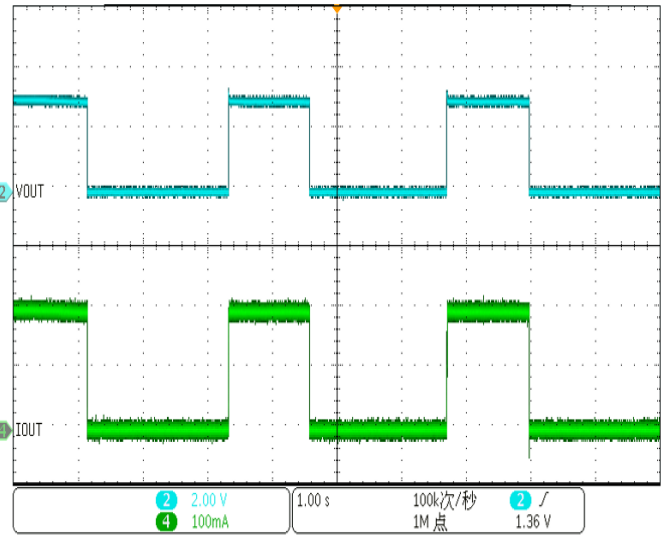

Thermal Protection Waveform

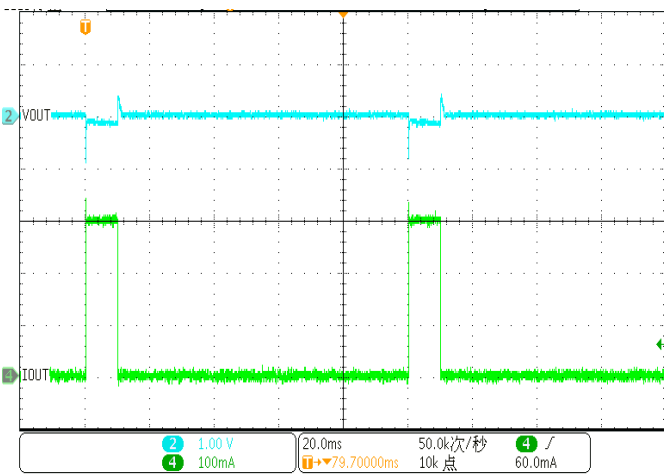


Pulse Load Current Output Waveform

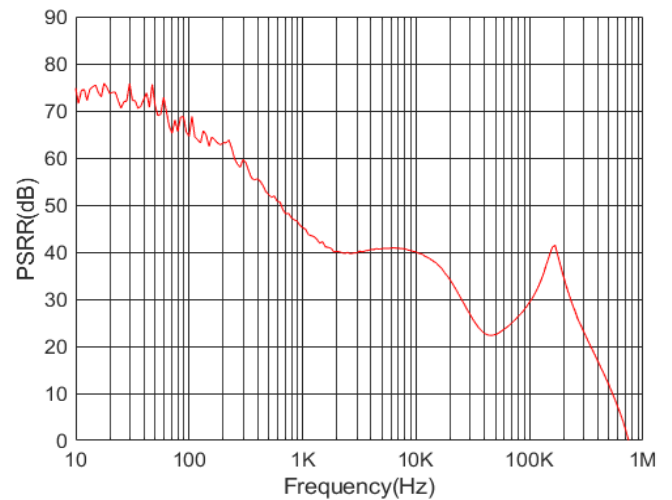


Power Supply Rejection Ratio vs. Frequency


WR0115

Block Diagram

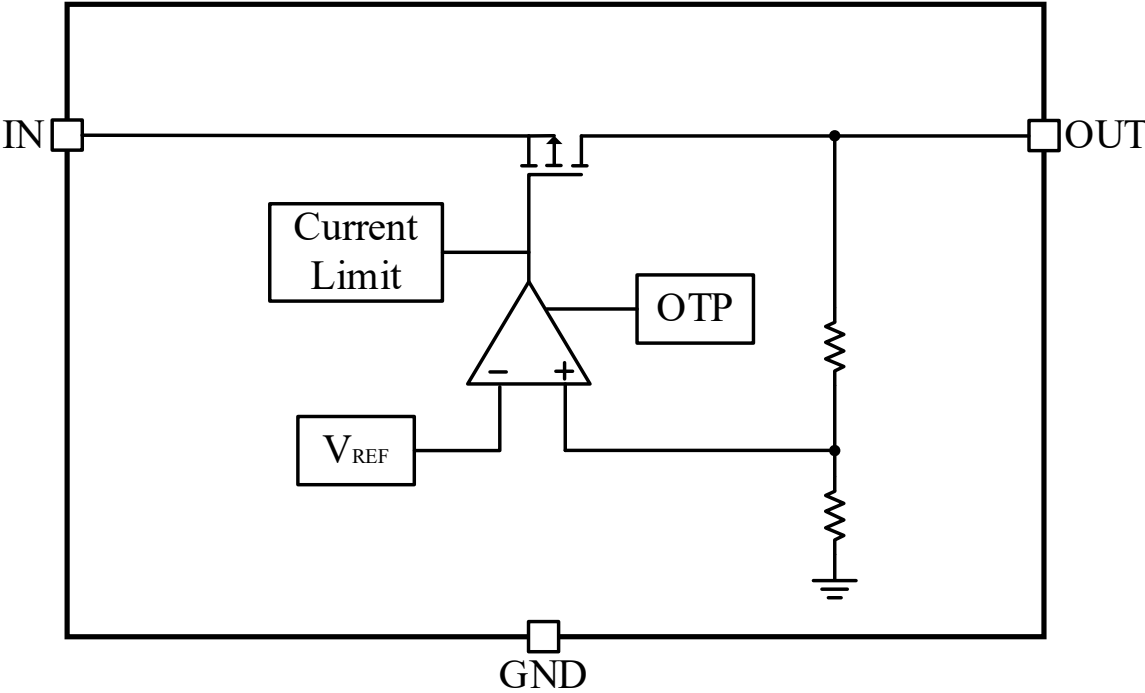

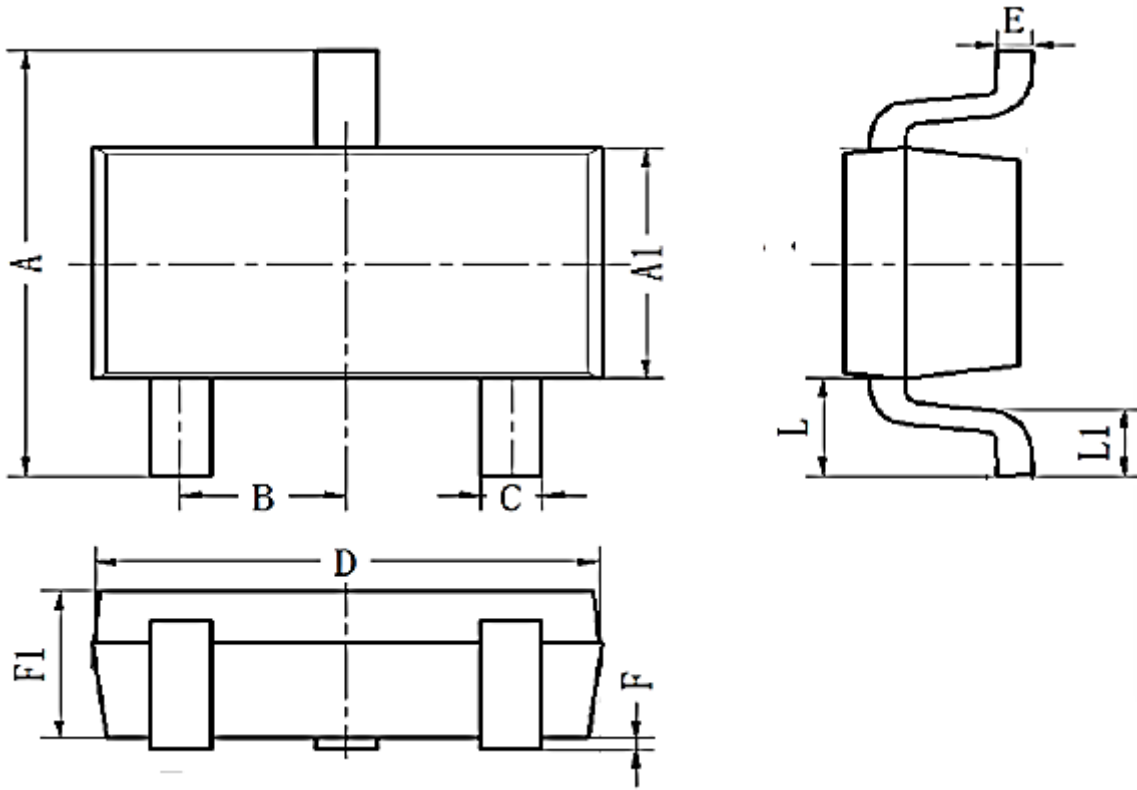
Package Information

SOT 23-3

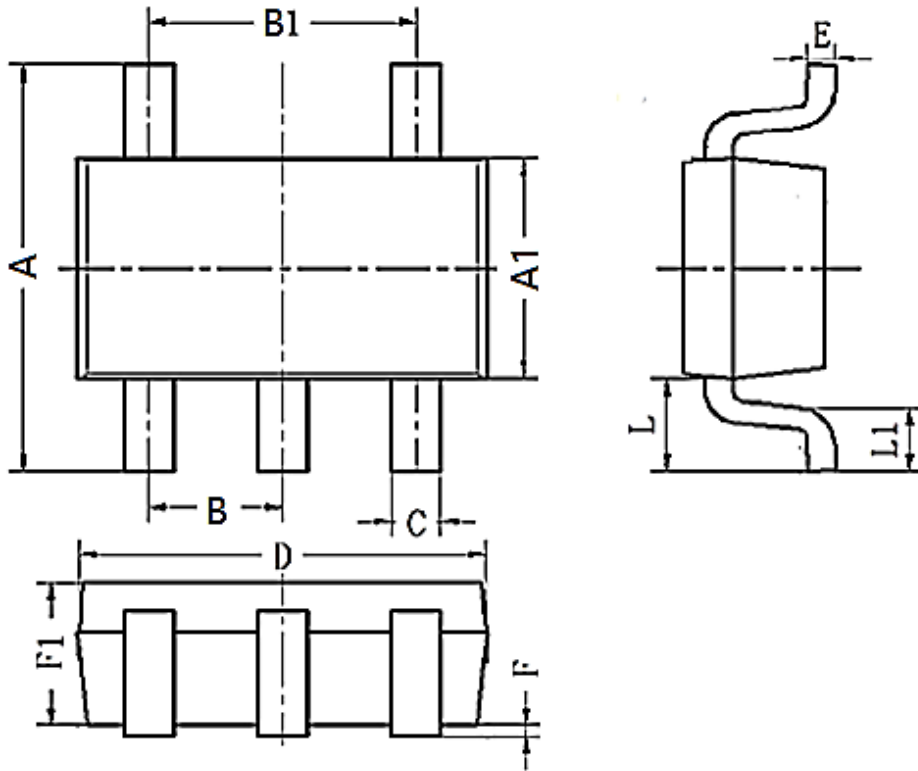SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	2.60	2.80	3.00
A1	1.50	1.60	1.70
B	0.95BSC		
C	0.25	0.40	0.50
D	2.82	2.92	3.02
E	0.10	0.15	0.20
L	0.59REF		
L1	0.30	0.45	0.60
F1	0.90	1.10	1.30
F	0.00	0.08	0.15



SOT 23-5/L

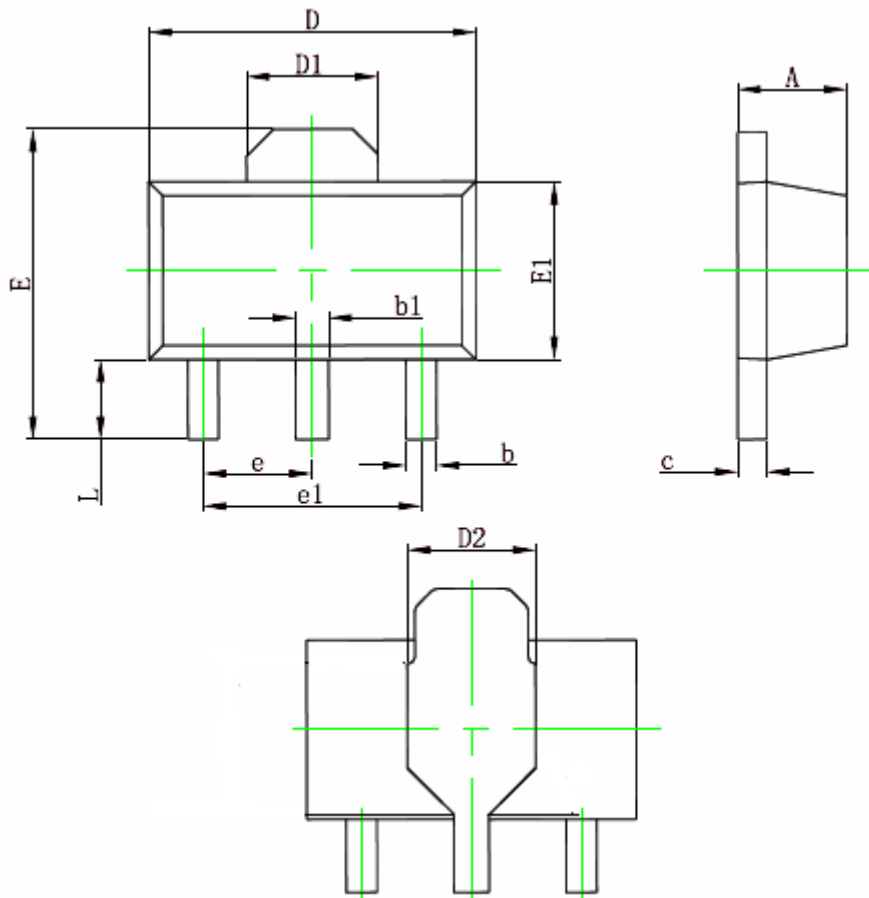SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	2.60	2.80	3.00
A1	1.50	1.60	1.70
B	0.95BSC		
B1	1.90BSC		
C	0.25	0.40	0.50
D	2.82	2.92	3.02
E	0.10	0.15	0.20
F	0.00	0.08	0.15
L	0.59REF		
F1	0.90	1.10	1.30
L1	0.30	0.45	0.60



SOT89-3/L

SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	1.4	1.5	1.6
b	0.320	0.420	0.520
b1	0.380	0.480	0.580
c	0.350	0.405	0.460
D	4.400	4.500	4.600
D1	1.65REF		
D2	1.700	1.950	2.200
E	3.940	4.120	4.300
E1	2.300	2.450	2.600
e	1.5BSC		
e1	3.00BSC		
L	0.800	1.000	1.200

Ordering Information

Part Number	Output Voltage	Package	Packing Quantity	Marking*
WR0115-12A30R	1.2V	SOT23-3	3k/Reel	WR0115 12 XXXX
WR0115-15A30R	1.5V	SOT23-3	3k/Reel	WR0115 15 XXXX
WR0115-18A30R	1.8V	SOT23-3	3k/Reel	WR0115 18 XXXX
WR0115-20A30R	2.0V	SOT23-3	3k/Reel	WR0115 20 XXXX
WR0115-22A30R	2.2V	SOT23-3	3k/Reel	WR0115 22 XXXX
WR0115-25A30R	2.5V	SOT23-3	3K/Reel	WR0115 25 XXXX
WR0115-28A30R	2.8V	SOT23-3	3k/Reel	WR0115 28 XXXX
WR0115-30A30R	3.0V	SOT23-3	3k/Reel	WR0115 30 XXXX
WR0115-33A30R	3.3V	SOT23-3	3k/Reel	WR0115 33 XXXX
WR0115-36A30R	3.6V	SOT23-3	3k/Reel	WR0115 36 XXXX
WR0115-45A30R	4.5V	SOT23-3	3k/Reel	WR0115 45 XXXX
WR0115-50A30R	5.0V	SOT23-3	3k/Reel	WR0115 50 XXXX
WR0115-A2A30R	12V	SOT23-3	3k/Reel	WR0115 A2 XXXX
WR0115-12A50R	1.2V	SOT23-5	3k/Reel	WR0115 12 XXXX
WR0115-15A50R	1.5V	SOT23-5	3k/Reel	WR0115 15 XXXX
WR0115-18A50R	1.8V	SOT23-5	3k/Reel	WR0115 18 XXXX
WR0115-20A50R	2.0V	SOT23-5	3k/Reel	WR0115 20 XXXX
WR0115-22A50R	2.2V	SOT23-5	3k/Reel	WR0115 22 XXXX
WR0115-25A50R	2.5V	SOT23-5	3k/Reel	WR0115 25 XXXX
WR0115-28A50R	2.8V	SOT23-5	3k/Reel	WR0115 28 XXXX
WR0115-30A50R	3.0V	SOT23-5	3k/Reel	WR0115 30 XXXX
WR0115-33A50R	3.3V	SOT23-5	3k/Reel	WR0115 33 XXXX
WR0115-36A50R	3.6V	SOT23-5	3k/Reel	WR0115 36 XXXX
WR0115-45A50R	4.5V	SOT23-5	3k/Reel	WR0115 45 XXXX
WR0115-50A50R	5.0V	SOT23-5	3k/Reel	WR0115 50 XXXX
WR0115-A2A50R	12V	SOT23-5	3k/Reel	WR0115 A2 XXXX
WR0115-12A51R	1.2V	SOT23-5L	3k/Reel	WR0115 12 XXXX
WR0115-15A51R	1.5V	SOT23-5L	3k/Reel	WR0115 15 XXXX
WR0115-18A51R	1.8V	SOT23-5L	3k/Reel	WR0115 18 XXXX
WR0115-20A51R	2.0V	SOT23-5L	3k/Reel	WR0115 20 XXXX
WR0115-22A51R	2.2V	SOT23-5L	3k/Reel	WR0115 22 XXXX
WR0115-25A51R	2.5V	SOT23-5L	3k/Reel	WR0115 25 XXXX
WR0115-28A51R	2.8V	SOT23-5L	3k/Reel	WR0115 28 XXXX
WR0115-30A51R	3.0V	SOT23-5L	3k/Reel	WR0115 30 XXXX

Part Number	Output Voltage	Package	Packing Quantity	Marking*
WR0115-33A51R	3.3V	SOT23-5L	3k/Reel	WR0115 33 XXXX
WR0115-36A51R	3.6V	SOT23-5L	3k/Reel	WR0115 36 XXXX
WR0115-45A51R	4.5V	SOT23-5L	3k/Reel	WR0115 45 XXXX
WR0115-50A51R	5.0V	SOT23-5L	3k/Reel	WR0115 50 XXXX
WR0115-A2A51R	12V	SOT23-5L	3k/Reel	WR0115 A2 XXXX
WR0115-12A20R	1.2V	SOT89-3	1k/Reel	WR0115 12 XXXX
WR0115-15A20R	1.5V	SOT89-3	1k/Reel	WR0115 15 XXXX
WR0115-18A20R	1.8V	SOT89-3	1k/Reel	WR0115 18 XXXX
WR0115-20A20R	2.0V	SOT89-3	1k/Reel	WR0115 20 XXXX
WR0115-22A20R	2.2V	SOT89-3	1k/Reel	WR0115 22 XXXX
WR0115-25A20R	2.5V	SOT89-3	1k/Reel	WR0115 25 XXXX
WR0115-28A20R	2.8V	SOT89-3	1k/Reel	WR0115 28 XXXX
WR0115-30A20R	3.0V	SOT89-3	1k/Reel	WR0115 30 XXXX
WR0115-33A20R	3.3V	SOT89-3	1k/Reel	WR0115 33 XXXX
WR0115-36A20R	3.6V	SOT89-3	1k/Reel	WR0115 36 XXXX
WR0115-45A20R	4.5V	SOT89-3	1k/Reel	WR0115 45 XXXX
WR0115-50A20R	5.0V	SOT89-3	1k/Reel	WR0115 50 XXXX
WR0115-A2A20R	12V	SOT89-3	1k/Reel	WR0115 A2 XXXX
WR0115-12A21R	1.2V	SOT89-3L	1k/Reel	WR0115 12 XXXX
WR0115-15A21R	1.5V	SOT89-3L	1k/Reel	WR0115 15 XXXX
WR0115-18A21R	1.8V	SOT89-3L	1k/Reel	WR0115 18 XXXX
WR0115-20A21R	2.0V	SOT89-3L	1k/Reel	WR0115 20 XXXX
WR0115-22A21R	2.2V	SOT89-3L	1k/Reel	WR0115 22 XXXX
WR0115-25A21R	2.5V	SOT89-3L	1k/Reel	WR0115 25 XXXX
WR0115-28A21R	2.8V	SOT89-3L	1k/Reel	WR0115 28 XXXX
WR0115-30A21R	3.0V	SOT89-3L	1k/Reel	WR0115 30 XXXX
WR0115-33A21R	3.3V	SOT89-3L	1k/Reel	WR0115 33 XXXX
WR0115-36A21R	3.6V	SOT89-3L	1k/Reel	WR0115 36 XXXX
WR0115-45A21R	4.5V	SOT89-3L	1k/Reel	WR0115 45 XXXX
WR0115-50A21R	5.0V	SOT89-3L	1k/Reel	WR0115 50 XXXX
WR0115-A2A21R	12V	SOT89-3L	1k/Reel	WR0115 A2 XXXX

*XXXX is variable.


Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201202

Tel: 86-21-68960674 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

 [®] is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.