




# WSxxP15SMC(-B)-AT

## Automotive Load Dump Protection TVS

### Features

- 1500 watts Peak Pulse Power (10/1000 $\mu$ s)
- Unidirectional and Bidirectional Protection
- Fast Response Time : Typically < 1ns
- Excellent Clamping Capability
- Built-in Strain relief
- Low inductance
- Low profile package
- IEC 61000-4-2 (ESD)  $\pm$ 30kV(air),  $\pm$ 30kV(contact)
- MSL: Level 1
- AEC-Q101 compliant

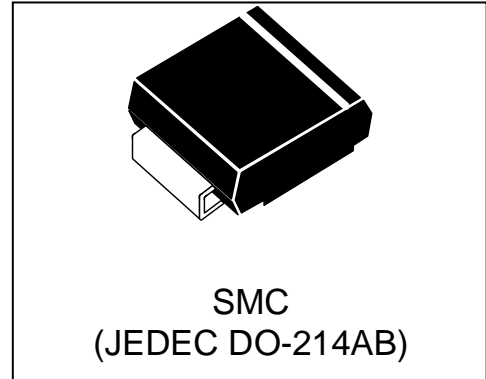

### Mechanical Characteristics

- JEDEC DO-214AB package
- Molding compound flammability rating:  
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

### Applications

- Auto power system
- Car audio and video
- Automotive instrument
- Car GPS
- Can-bus

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Peak Pulse Power (tp =10/1000 $\mu$ s) (see Note1&2)	P <sub>PPM</sub>	1500	Watts
Peak pulse current (10/1000 $\mu$ s) (see Note2)	I <sub>PPM</sub>	See Electrical Characteristics	A
Power Dissipation on infinite heat sink T <sub>L</sub> = 50 °C (Fig4)	P <sub>D</sub>	6.5	W
Operating Junction Temperature range	T <sub>J</sub>	-65 to + 150	°C
Storage Temperature range	T <sub>STG</sub>	-65 to + 150	°C
Thermal Resistance from Junction-to Lead	R <sub><math>\theta</math>JL</sub>	15	°C/W
Thermal Resistance from Junction-to Ambient	R <sub><math>\theta</math>JA</sub>	75	°C/W

**Note1:** Peak Pulse Power Rating as Pulse Width ,per Fig1.

**Note2:** Peak Pulse Power or Current Derated above T<sub>A</sub>=25°C Per Fig. 2 and Non-Repetitive Current Pulse, Per Fig.3.

## Electrical Characteristics

Part Number		Marking		Reverse Stand off Voltage $V_{RWM}$ (Volts)	Breakdown Voltage $V_{BR}@I_T$ (Volts)		Test Current $I_T$ (mA)	Maximum Clamping Voltage $V_C@I_{PP}$ (Volts)	Maximum Peak Pulse Current $I_{PP}$ (Amps)	Maximum Reverse Leakage $I_R@V_{RWM}$ ( $\mu$ A)
UNI-POLAR	BI-POLAR	UNI-POLAR	BI-POLAR		MIN	MAX				
WS5.0P15SMC-AT	WS5.0P15SMC-B-AT	CPUY	CPVZ	5.0	6.40	7.00	10	9.2	163	800
WS6.0P15SMC-AT	WS6.0P15SMC-B-AT	CQUY	CQVZ	6.0	6.67	7.37	10	10.3	145.7	800
WS6.5P15SMC-AT	WS6.5P15SMC-B-AT	CQUP	CQVP	6.5	7.22	7.98	10	11.2	134	500
WS7.0P15SMC-AT	WS7.0P15SMC-B-AT	CRUY	CRVZ	7.0	7.78	8.60	10	12.0	125	200
WS7.5P15SMC-AT	WS7.5P15SMC-B-AT	CRUP	CRVP	7.5	8.33	9.21	1	12.9	116.3	100
WS8.0P15SMC-AT	WS8.0P15SMC-B-AT	CSUY	CSVZ	8.0	8.89	9.83	1	13.6	110.3	50
WS8.5P15SMC-AT	WS8.5P15SMC-B-AT	CSUP	CSVP	8.5	9.44	10.40	1	14.4	104.2	20
WS9.0P15SMC-AT	WS9.0P15SMC-B-AT	CTUY	CTVZ	9.0	10.00	11.10	1	15.4	97.4	10
WS10P15SMC-AT	WS10P15SMC-B-AT	CYLY	CZLZ	10	11.10	12.30	1	17.0	88.3	5
WS11P15SMC-AT	WS11P15SMC-B-AT	CYLL	CZLL	11	12.20	13.50	1	18.2	82.5	1
WS12P15SMC-AT	WS12P15SMC-B-AT	CYLM	CZLM	12	13.30	14.7	1	19.9	75.4	1
WS13P15SMC-AT	WS13P15SMC-B-AT	CYLN	CZLN	13	14.40	15.90	1	21.5	69.8	1
WS14P15SMC-AT	WS14P15SMC-B-AT	CYLO	CZLO	14	15.60	17.20	1	23.2	64.7	1
WS15P15SMC-AT	WS15P15SMC-B-AT	CYLP	CZLP	15	16.7	18.5	1	24.4	61.5	1
WS16P15SMC-AT	WS16P15SMC-B-AT	CYLQ	CZLQ	16	17.8	19.7	1	26.0	57.7	1
WS18P15SMC-AT	WS18P15SMC-B-AT	CYLS	CZLS	18	20.0	22.1	1	29.2	51.4	1
WS20P15SMC-AT	WS20P15SMC-B-AT	CYMY	CZMZ	20	22.2	24.5	1	32.4	46.3	1
WS22P15SMC-AT	WS22P15SMC-B-AT	CYMM	CZMM	22	24.4	26.9	1	35.5	42.3	1
WS24P15SMC-AT	WS24P15SMC-B-AT	CYMO	CZMO	24	26.7	29.5	1	38.9	38.6	1
WS26P15SMC-AT	WS26P15SMC-B-AT	CYMQ	CZMQ	26	28.9	31.9	1	42.1	35.7	1
WS28P15SMC-AT	WS28P15SMC-B-AT	CYMS	CZMS	28	31.1	34.4	1	45.4	33.1	1
WS30P15SMC-AT	WS30P15SMC-B-AT	CYNY	CZNZ	30	33.3	36.8	1	48.4	31.0	1
WS33P15SMC-AT	WS33P15SMC-B-AT	CYNN	CZNN	33	36.7	40.6	1	53.3	28.2	1
WS36P15SMC-AT	WS36P15SMC-B-AT	CYNQ	CZNQ	36	40.0	44.2	1	58.1	25.9	1
WS40P15SMC-AT	WS40P15SMC-B-AT	CYOY	CZOZ	40	44.4	49.1	1	64.5	23.3	1
WS43P15SMC-AT	WS43P15SMC-B-AT	CYON	CZON	43	47.8	52.8	1	69.4	21.7	1
WS45P15SMC-AT	WS45P15SMC-B-AT	CYOP	CZOP	45	50.00	55.30	1	72.7	20.6	1
WS48P15SMC-AT	WS48P15SMC-B-AT	CYOS	CZOS	48	53.30	58.90	1	77.4	19.4	1

## Electrical Characteristics (Cont.)

Part Number		Marking		Reverse Stand off Voltage $V_{RWM}$ (Volts)	Breakdown Voltage $V_{BR}@I_T$ (Volts)		Test Current $I_T$ (mA)	Maximum Clamping Voltage $V_C@I_{PP}$ (Volts)	Maximum Peak Pulse Current $I_{PP}$ (Amps)	Maximum Reverse Leakage $I_R@V_{RWM}$ ( $\mu$ A)
UNI-POLAR	BI-POLAR	UNI-POLAR	BI-POLAR		MIN	MAX				
WS51P15SMC-AT	WS51P15SMC-B-AT	CYPL	CZPL	51	56.70	62.70	1	82.4	18.2	1
WS54P15SMC-AT	WS54P15SMC-B-AT	CYPO	CZPO	54	60.00	66.30	1	87.1	17.3	1
WS58P15SMC-AT	WS58P15SMC-B-AT	CYPS	CZPS	58	64.40	71.20	1	93.6	16.1	1
WS60P15SMC-AT	WS60P15SMC-B-AT	CYQY	CZQZ	60	66.70	73.70	1	96.8	15.5	1
WS64P15SMC-AT	WS64P15SMC-B-AT	CYQO	CZQO	64	71.10	78.60	1	103	14.6	1
WS70P15SMC-AT	WS70P15SMC-B-AT	CYRY	CZRZ	70	77.80	86.00	1	113	13.3	1
WS75P15SMC-AT	WS75P15SMC-B-AT	CYRP	CZRP	75	83.30	92.10	1	121	12.4	1
WS78P15SMC-AT	WS78P15SMC-B-AT	CYRS	CZRS	78	86.70	95.80	1	126	11.9	1
WS85P15SMC-AT	WS85P15SMC-B-AT	CYSP	CZSP	85	94.40	104	1	137	11	1
WS90P15SMC-AT	WS90P15SMC-B-AT	CYTY	CZTZ	90	100	111	1	146	10.3	1
WS100P15SMC-AT	WS100P15SMC-B-AT	CLYY	CLZZ	100	111	123	1	162	9.3	1
WS110P15SMC-AT	WS110P15SMC-B-AT	CLLY	CLLZ	110	122	135	1	177	8.5	1
WS120P15SMC-AT	WS120P15SMC-B-AT	CLMY	CLMZ	120	133	147	1	193	7.8	1
WS130P15SMC-AT	WS130P15SMC-B-AT	CLNY	CLNZ	130	144	159	1	209	7.2	1
WS150P15SMC-AT	WS150P15SMC-B-AT	CLPY	CLPZ	150	167	185	1	243	6.2	1
WS160P15SMC-AT	WS160P15SMC-B-AT	CLQY	CLQZ	160	178	197	1	259	5.8	1
WS170P15SMC-AT	WS170P15SMC-B-AT	CLRY	CLRZ	170	189	209	1	275	5.5	1
WS180P15SMC-AT	WS180P15SMC-B-AT	CLSY	CLSZ	180	201	222	1	292	5.1	1
WS200P15SMC-AT	WS200P15SMC-B-AT	CMYY	CMZZ	200	224	247	1	324	4.6	1
WS220P15SMC-AT	WS220P15SMC-B-AT	CMMY	CMMZ	220	246	272	1	356	4.2	1
WS250P15SMC-AT	WS250P15SMC-B-AT	CMPY	CMPZ	250	279	309	1	405	3.7	1
WS300P15SMC-AT	WS300P15SMC-B-AT	CNYY	CNZZ	300	335	371	1	486	3.1	1
WS350P15SMC-AT	WS350P15SMC-B-AT	CNPY	CNPZ	350	391	432	1	567	2.6	1
WS400P15SMC-AT	WS400P15SMC-B-AT	COYY	COZZ	400	447	494	1	648	2.3	1
WS440P15SMC-AT	WS440P15SMC-B-AT	COOY	COOZ	440	492	543	1	713	2.1	1

### Typical Characteristics

Figure 1: Peak Pulse Power Rating Curve

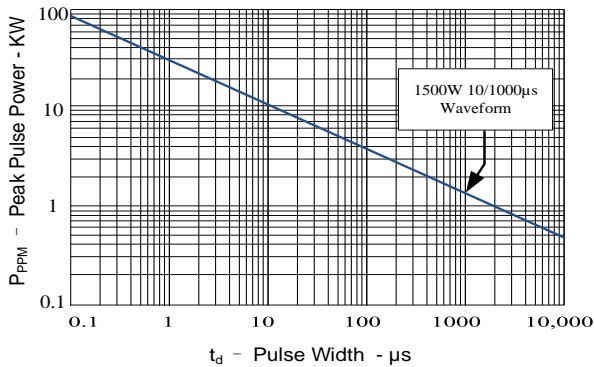


Figure 2: Pulse Derating Curve

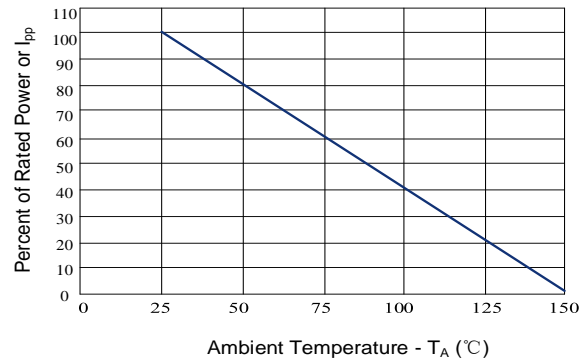


Figure 3: Pulse Waveform


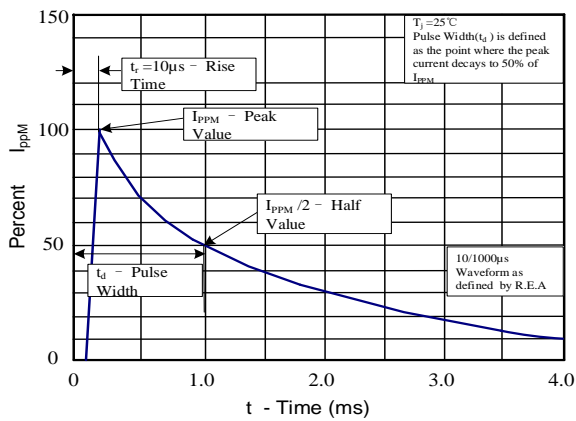



Figure 4: Steady State Power Dissipation Derating Curve

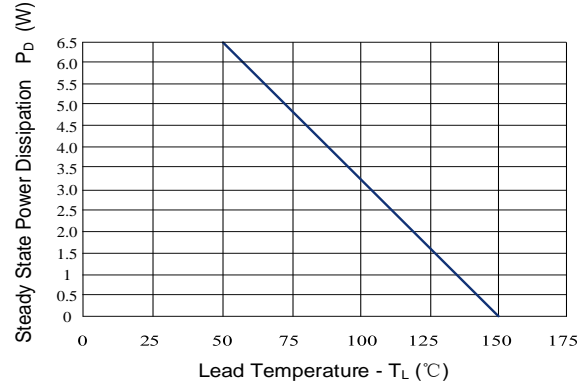

Note: The above typical parameters or typical characteristics are only indicative and do not make specific guarantees. If detailed values are required, additional communication and provision are required.


### Soldering Parameters

Reflow Condition		
Pre Heat	Temperature Min ( $T_{s(min)}$ )	150°C
	Temperature Max ( $T_{s(max)}$ )	200°C
	Time (min to max) ( $t_s$ )	60-190 s
Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak		3°C/s max
Ts(max) to $T_L$ - Ramp-up Rate		3°C/s max
Reflow	Temperature( $T_L$ ) (Liquidus)	217°C
	Temperature ( $t_L$ )	60-150 s
Peak Temperature ( $T_P$ )		260 <sup>+0/-5</sup> °C
Time within actual peak Temperature ( $t_p$ )		20-40 s
Ramp-down Rate		5°C/s max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes max
Do not exceed		260°C

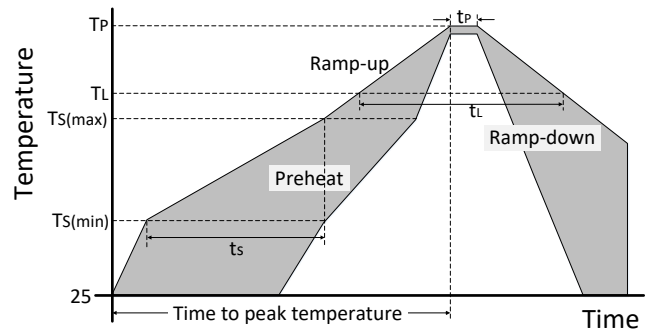


Outline Drawing – SMC (DO-214AB)

Ref. (mm)	Millimeters	
	Min.	Max.
A	2.06	2.70
A1	-	0.30
B	2.90	3.20
E	6.60	7.40
E1	7.75	8.13
D	5.59	6.22
L	0.76	1.52

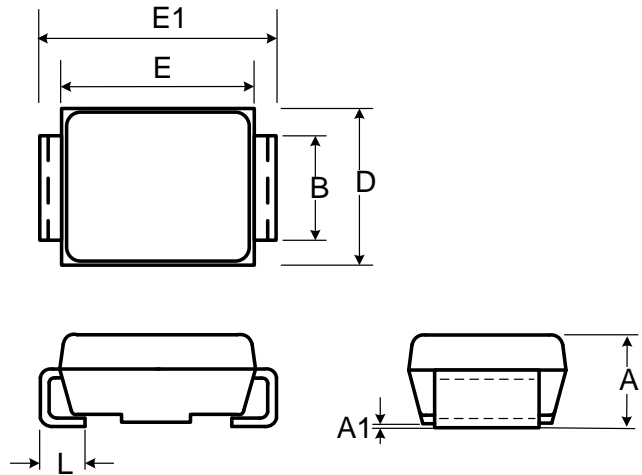


Recommended Solder Pad Layout

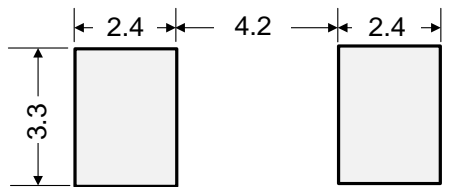


Dimensions in mm

Part Numbering System

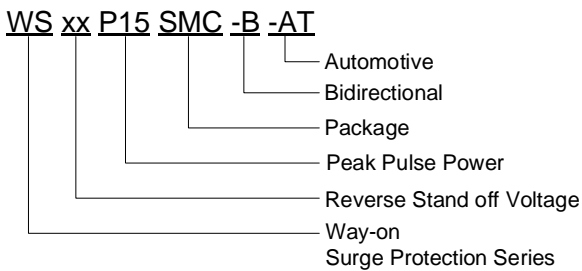

Part Marking System

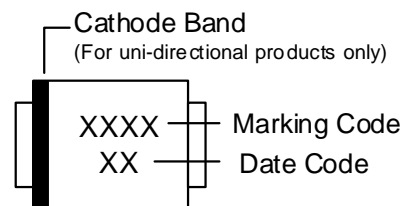


Package Information


Package Type	Description	Quantity (pcs)
SMC(DO-214AB)	Tape & Reel -16mm/13" tape	3000

### Tape and Reel Information


Reel Dimensions



Tape Dimensions

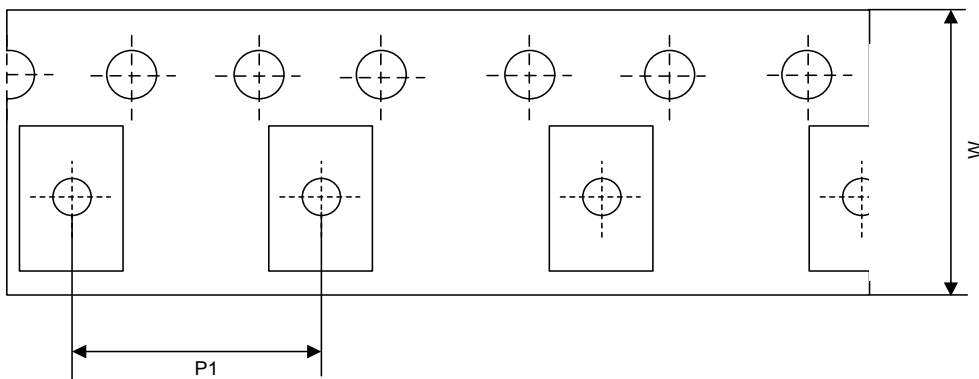

Quadrant Assignments for PIN1 Orientation in tape

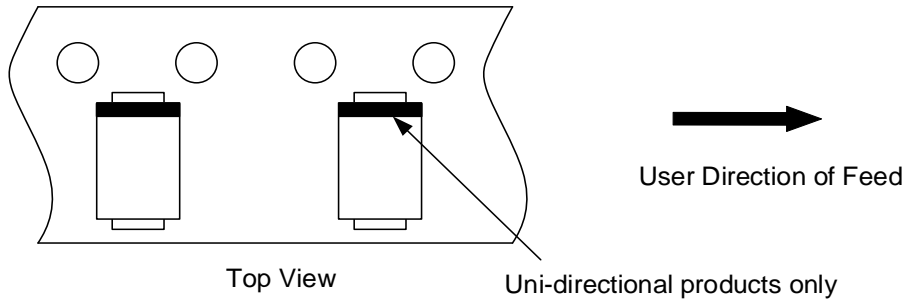

RD	Reel Dimensions	13 inch
W	Overall width of the carrier tape	16 mm
P1	Pitch between successive cavity centers	8 mm

### Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207  
 Tel: +86-21-50310888 Fax: 86-21-50757680 Email: market@way-on.com  
 WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

**WAYON**® is registered trademarks of Wayon Corporation.

## Product Specification Statement

The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. WAYON shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and WAYON assumes no responsibility for the application of the product.

WAYON strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, WAYON cannot guarantee that the information provided in the product specification is entirely accurate and error-free. WAYON shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications. WAYON reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with WAYON to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult WAYON in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.

Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. WAYON shall assume no responsibility for any consequences resulting from such usage.

Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. WAYON shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.