


## 100V P-Channel Enhancement Mode Power MOSFET


### Description

WMO13P10TS uses advanced power trench technology that has been especially tailored to minimize the on-state resistance and yet maintain superior switching performance.

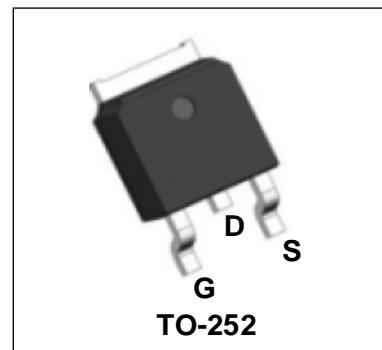

### Features

- $V_{DS} = -100V$ ,  $I_D = -13.4A$   
 $R_{DS(on)} < 170m\Omega$  @  $V_{GS} = -10V$   
 $R_{DS(on)} < 180m\Omega$  @  $V_{GS} = -4.5V$
- Fast Switching
- Low Gate Charge
- 100% EAS Guaranteed

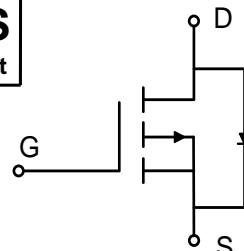

### Applications

- Power Management Switches
- DC/DC Converter
- LED Backlighting

### Absolute Maximum Ratings ( $T_A = 25^\circ C$ , unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source voltage	$V_{DS}$	-100	V
Gate-Source voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current  $T_c=25^\circ C$	$I_D$	-13.4	A
$T_c=100^\circ C$		-8.5	
Pulsed Drain Current <sup>1</sup>	$I_{DM}$	-53.6	A
Single Pulse Avalanche Energy <sup>2</sup>	$EAS$	33.8	mJ
Total Power Dissipation	$P_D$	62.5	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction-to-Ambient <sup>3</sup>	$R_{\theta JA}$	55	°C/W
Thermal Resistance from Junction-to-Case	$R_{\theta JC}$	2	°C/W


**Electrical Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise noted)**

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0\text{V}, I_D = -250\mu\text{A}$	-100	-	-	V
Gate-body Leakage current	$I_{\text{GSS}}$	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$	-	-	$\pm 100$	nA
Zero Gate Voltage Drain Current $T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	$I_{\text{DSS}}$	$V_{DS} = -100\text{V}, V_{GS} = 0\text{V}$	-	-	-1	$\mu\text{A}$
			-	-	-100	
Gate-Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-1.2	-1.7	-2.2	V
Drain-Source On-Resistance <sup>4</sup>	$R_{DS(\text{on})}$	$V_{GS} = -10\text{V}, I_D = -8\text{A}$	-	130	170	$\text{m}\Omega$
		$V_{GS} = -4.5\text{V}, I_D = -5\text{A}$	-	145	180	
Forward Transconductance <sup>4</sup>	$g_{fs}$	$V_{DS} = -10\text{V}, I_D = -8\text{A}$	-	10	-	S
<b>Dynamic Characteristics<sup>5</sup></b>						
Input Capacitance	$C_{iss}$	$V_{DS} = -50\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$	-	730	-	$\text{pF}$
Output Capacitance	$C_{oss}$		-	59	-	
Reverse Transfer Capacitance	$C_{rss}$		-	9.3	-	
Gate Resistance	$R_g$	f=1MHz	-	18.8	-	$\Omega$
<b>Switching Characteristics<sup>5</sup></b>						
Total Gate Charge	$Q_g$	$V_{GS} = -10\text{V}, V_{DS} = -50\text{V}$ $I_D = -8\text{A}$	-	19	-	$\text{nC}$
Gate-Source Charge	$Q_{gs}$		-	4.3	-	
Gate-Drain Charge	$Q_{gd}$		-	4	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS} = -10\text{V}, V_{DD} = -50\text{V}$ $R_G = 3\Omega, I_D = -8\text{A}$	-	6.6	-	$\text{ns}$
Rise Time	$t_r$		-	8	-	
Turn-Off Delay Time	$t_{d(off)}$		-	48	-	
Fall Time	$t_f$		-	30	-	
Reverse Recovery Time	$t_{rr}$	$I_F = -8\text{A}, dI/dt = -100\text{A}/\mu\text{s}$	-	120	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	65	-	nC
<b>Drain-source body diode Characteristics</b>						
Diode Forward Voltage <sup>4</sup>	$V_{SD}$	$I_S = -8\text{A}, V_{GS} = 0\text{V}$	-	-	-1.2	V
Continuous Source Current	$T_A=25^\circ\text{C}$	$I_S$	-	-	-13.4	A

Notes:

1. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ .
2. The test condition is  $V_{DD} = -25\text{V}, V_{GS} = -10\text{V}, L = 0.4\text{mH}, I_{AS} = -13\text{A}$ .
3. The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper, The value in any given application depends on the user's specific board design.
4. The data tested by pulsed, pulse width  $\leq 300\text{us}$ , duty cycle  $\leq 2\%$ .
5. This value is guaranteed by design hence it is not included in the production test.

## Typical Characteristics

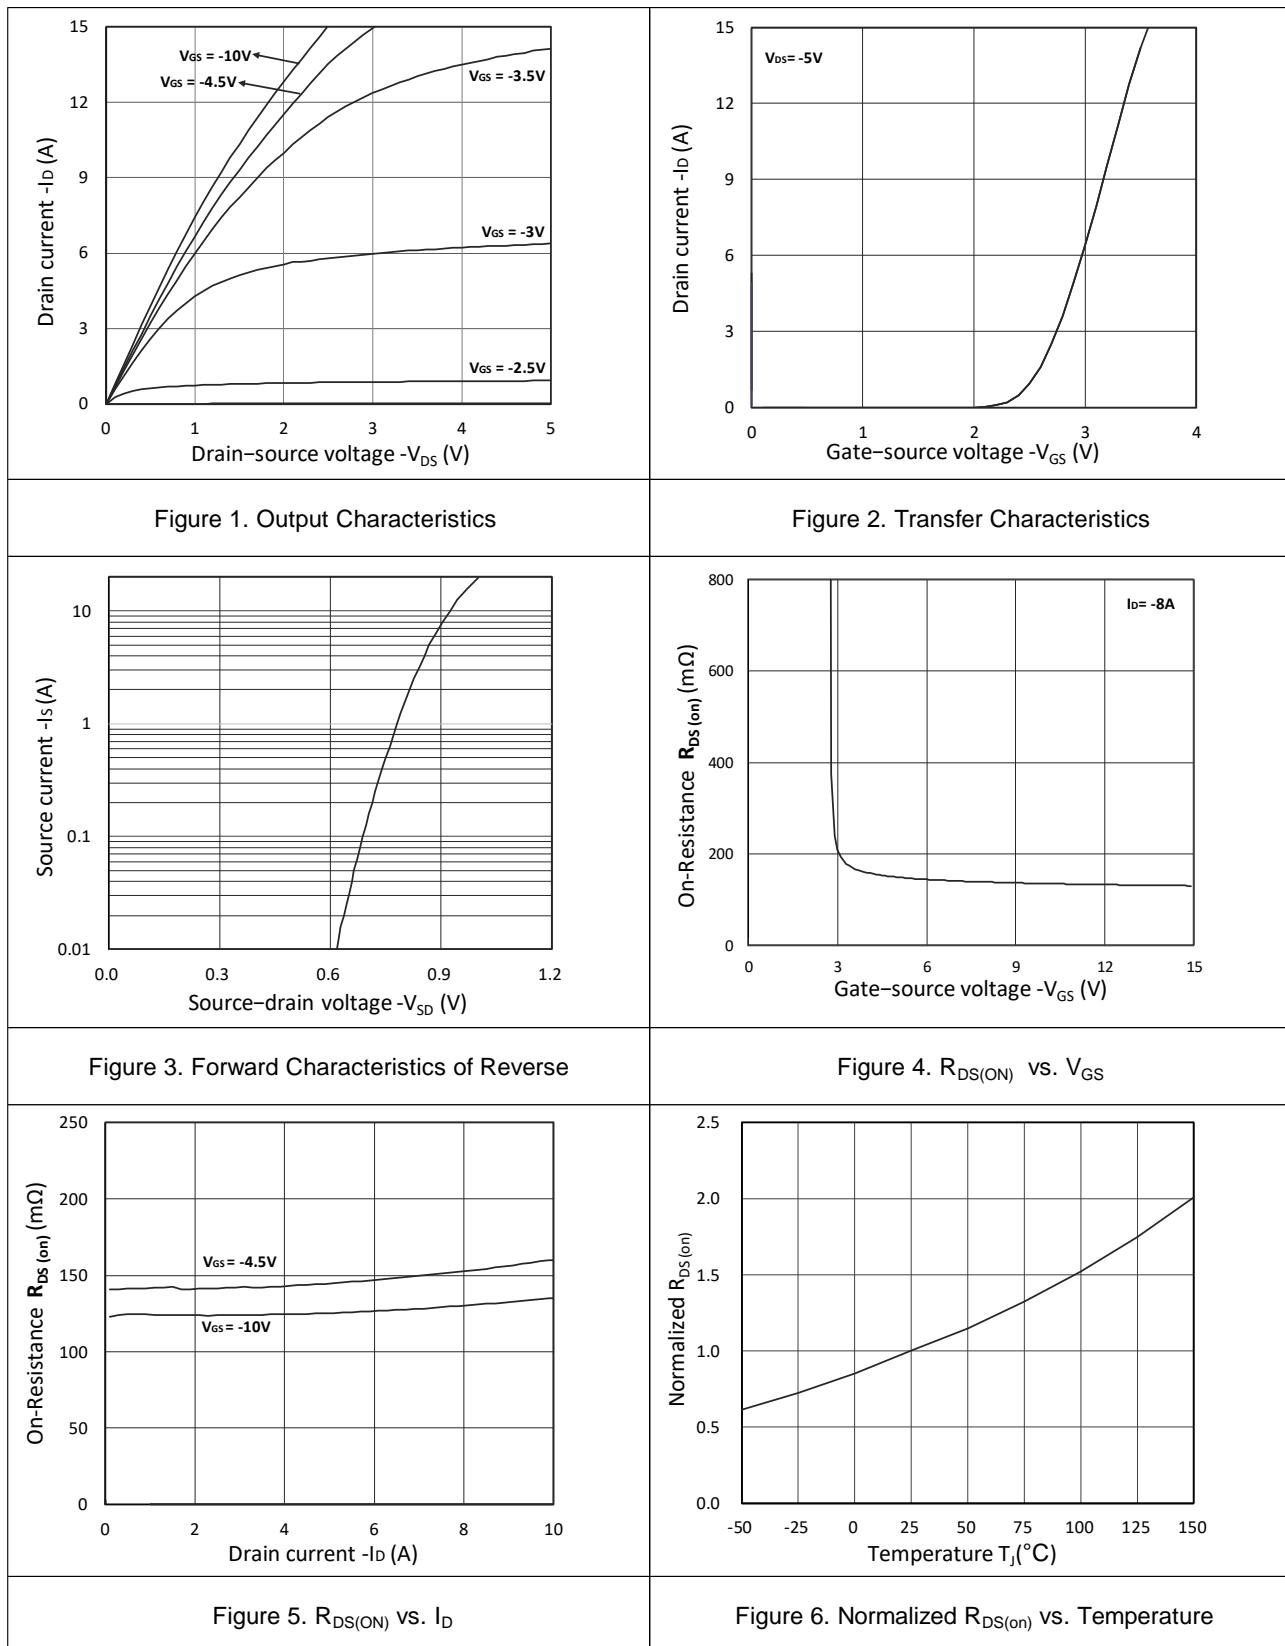

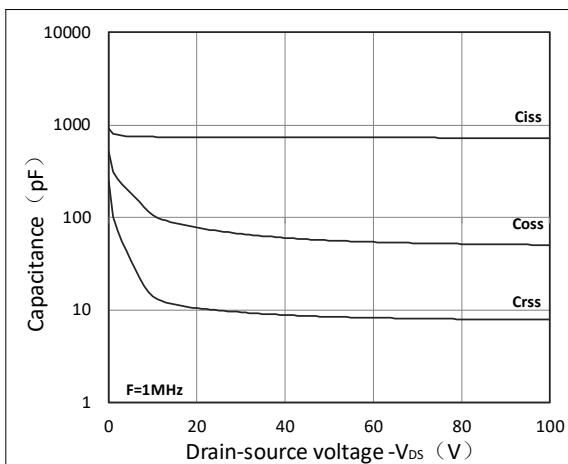


Figure 7. Capacitance Characteristics

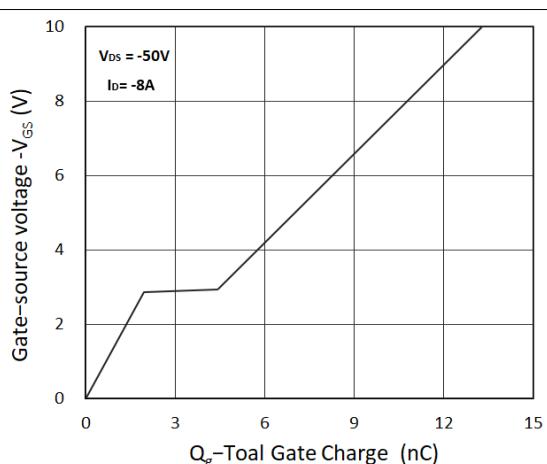


Figure 8. Gate Charge Characteristics

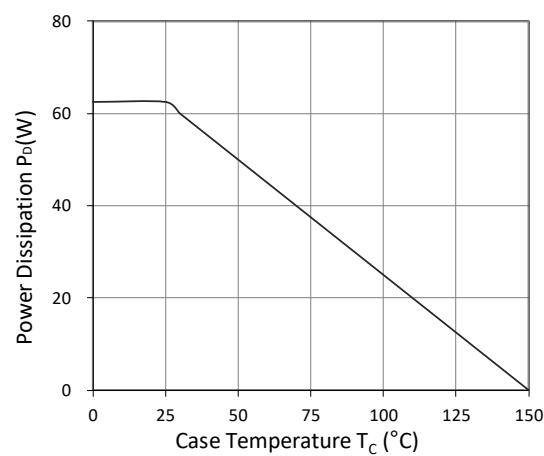


Figure 9. Power Dissipation

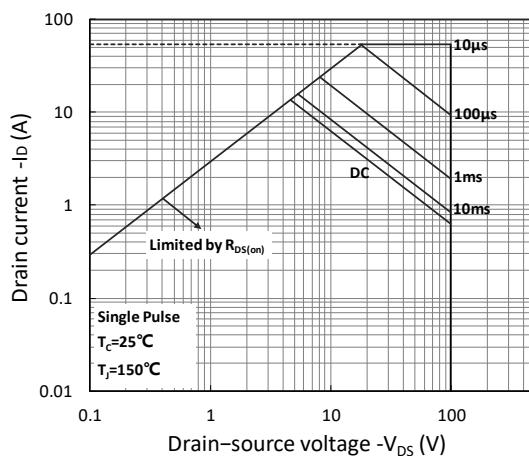


Figure 10. Safe Operating Area





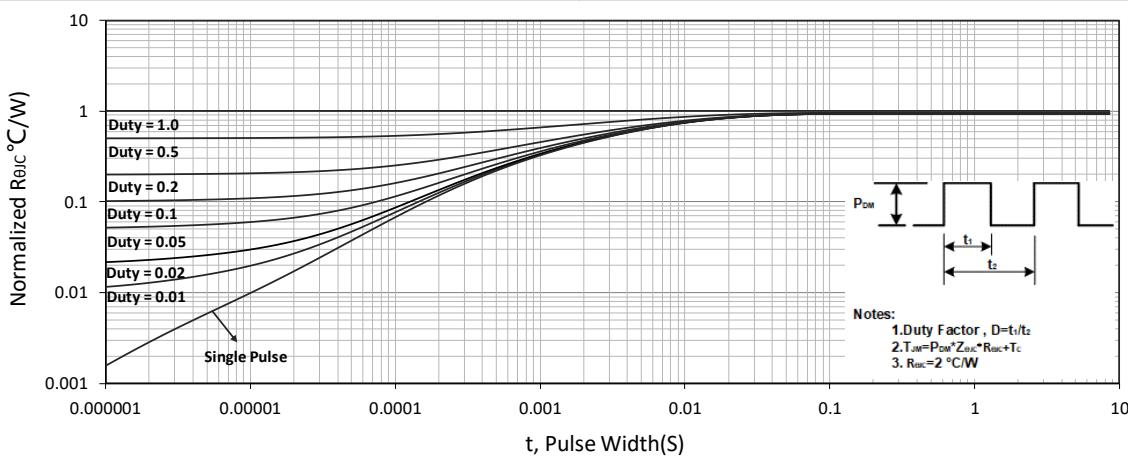


Figure 11. Normalized Maximum Transient Thermal Impedance

**Test Circuit****Figure A. Gate Charge Test Circuit & Waveforms****Figure B. Switching Test Circuit & Waveforms****Figure C. Unclamped Inductive Switching Circuit & Waveforms**

## Mechanical Dimensions for TO-252


## COMMON DIMENSIONS

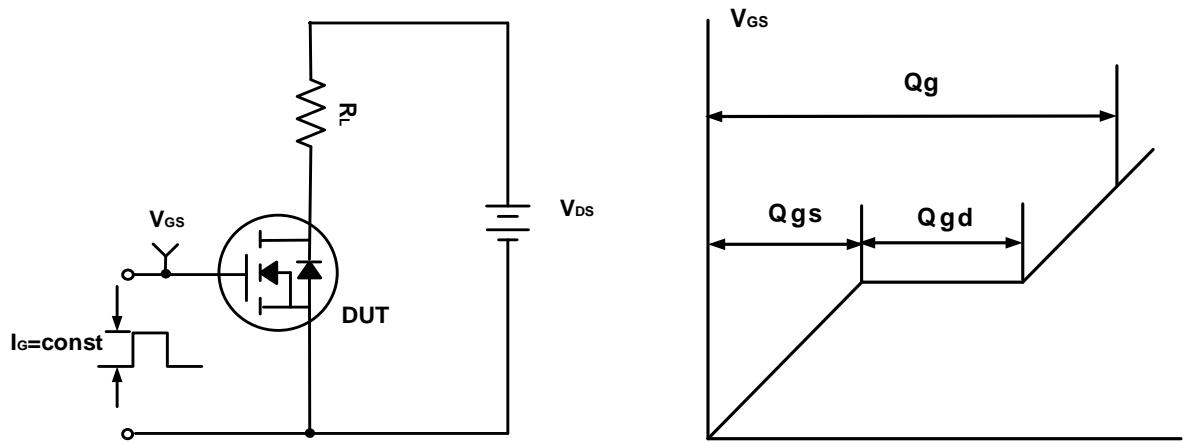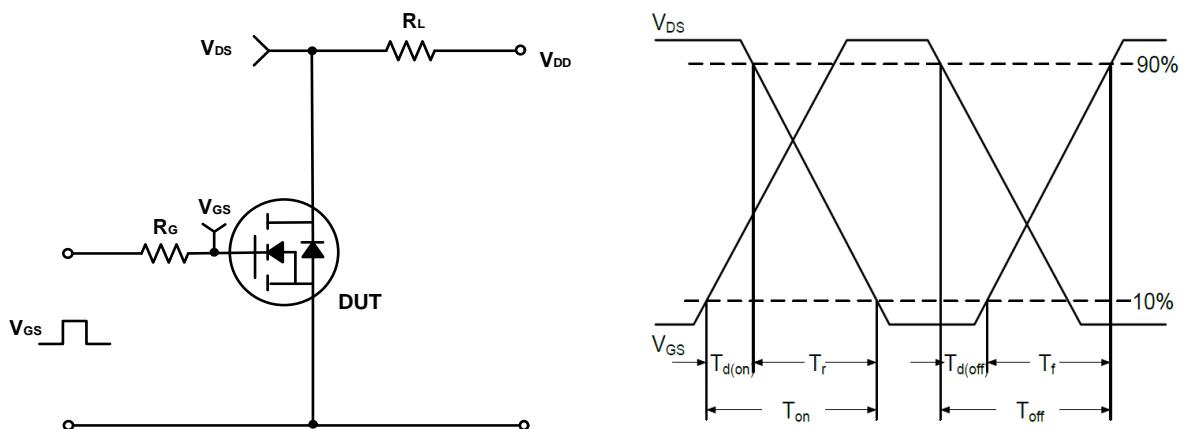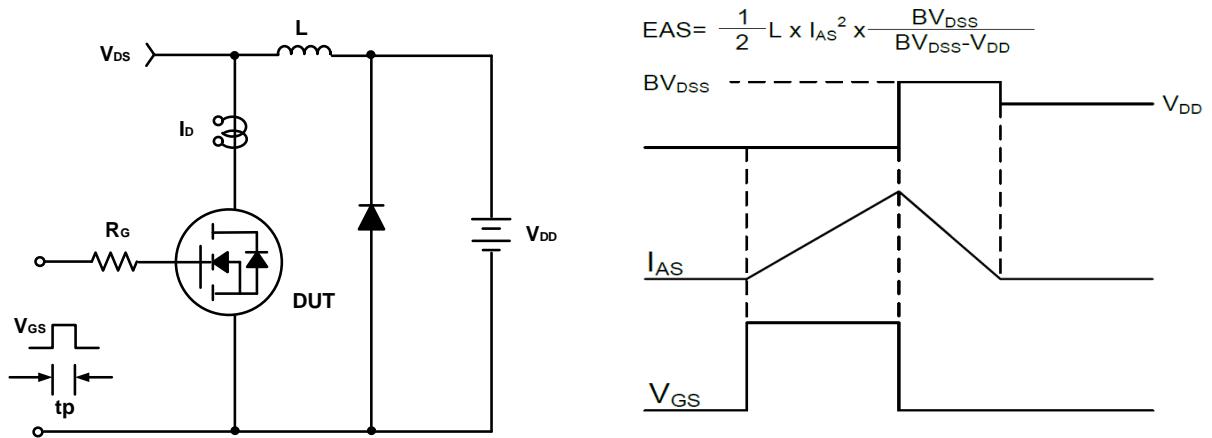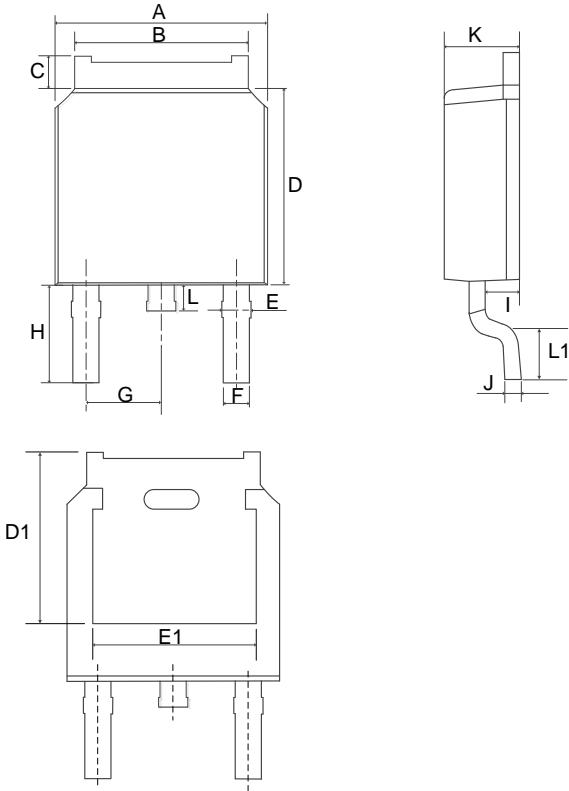

SYMBOL	MM	
	MIN	MAX
A	6.40	6.80
B	5.13	5.50
C	0.88	1.28
D	5.90	6.22
D1	5.35REF	
E	0.68	1.10
E1	4.83REF	
F	0.68	0.91
G	2.29REF	
H	2.90REF	
I	0.85	1.17
J	0.51REF	
K	2.10	2.50
L	0.40	1.00
L1	1.50REF	

**Ordering Information**

Part	Package	Marking	Packing method
WMO13P10TS	TO-252	WMO13P10TS	Tape and Reel

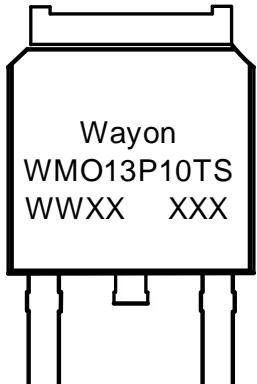**Marking Information**

WMO13P10TS = Device code

WWXX XXX= Date code

**Contact Information**

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207

Tel: 86-21-50310888 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

**WAYON**® is registered trademarks of Wayon Corporation.**Disclaimer**

WAYON reserves the right to make changes without further notice to any Products herein to improve reliability, function, or design. The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. WAYON does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Products or technical information described in this document.