


Features


- Way-on Small Signal MOSFETs
- $V_{DS} = 60V$, $I_D = 3A$
- $R_{DS(on)} < 83m\Omega$ @ $V_{GS} = 10V$
- $R_{DS(on)} < 90m\Omega$ @ $V_{GS} = 4.5V$
- Trench LV MOSFET Technology

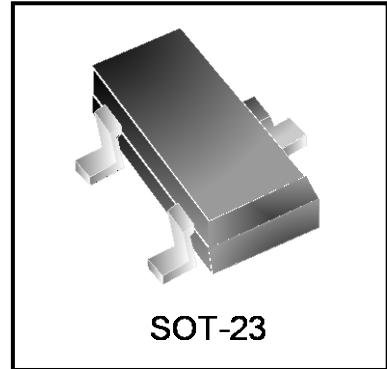

Mechanical Characteristics

- SOT-23 Package
- Marking : Making Code
- RoHS Compliant

Schematic & PIN Configuration

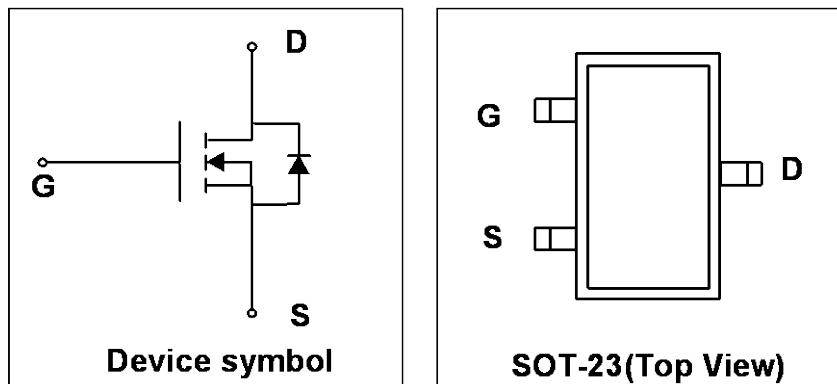

Absolute Maximum Rating ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current $T_A=25^\circ C$	I_D	3	A
Pulsed Drain Current ¹	I_{DM}	12	A
Power Dissipation $T_A=25^\circ C$	P_D	1.5	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ C$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction-to-Ambient ²	$R_{\theta JA}$	83.3	$^\circ C/W$

Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 250µA	60	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 60V, V _{GS} = 0V	-	-	1	µA
Gate-body Leakage Current	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20V	-	-	±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250µA	1.2	1.7	2.2	V
Drain-Source On-state Resistance ³	R _{DS(on)}	V _{GS} = 10V, I _D = 2A	-	67	83	mΩ
		V _{GS} = 4.5V, I _D = 1A	-	75	90	
Dynamic Characteristics⁴						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 30V, f = 1MHz	-	635	-	pF
Output Capacitance	C _{oss}		-	26	-	
Reverse Transfer Capacitance	C _{rss}		-	20	-	
Switching Characteristics⁴						
Total Gate Charge	Q _g	V _{GS} = 10V, V _{DS} = 30V, I _D = 3A	-	11.3	-	nC
Gate-Source Charge	Q _{gs}		-	1.7	-	
Gate-Drain Charge	Q _{gd}		-	1.6	-	
Turn-on Delay Time	t _{d(on)}	V _{GS} = 10V, V _{DD} = 30V, I _D = 3A, R _G = 3Ω		1.6	-	ns
Turn-on Rise Time	t _r			2.5	-	
Turn-off Delay Time	t _{d(off)}		-	13.4	-	
Turn-off Fall Time	t _f		-	2.6	-	
Source-Drain Diode characteristics						
Body Diode Voltage ³	V _{SD}	I _S = 1A, V _{GS} = 0V	-	-	1.2	V
Continuous Source Current	I _S		-	-	3	A

Notes:

1. Repetitive rating, pulse width limited by junction temperature T_{J(MAX)}=150°C.
2. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper, The value in any given application depends on the user's specific board design.
3. Pulse Test: Pulse width≤300µs, duty cycle≤2%.
4. This value is guaranteed by design hence it is not included in the production test.

Typical Characteristics

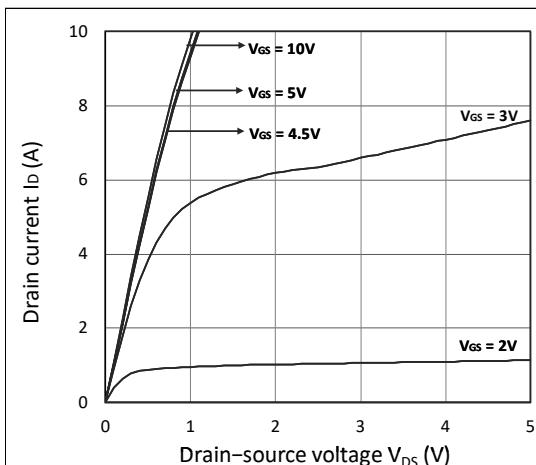


Figure 1. Output Characteristics

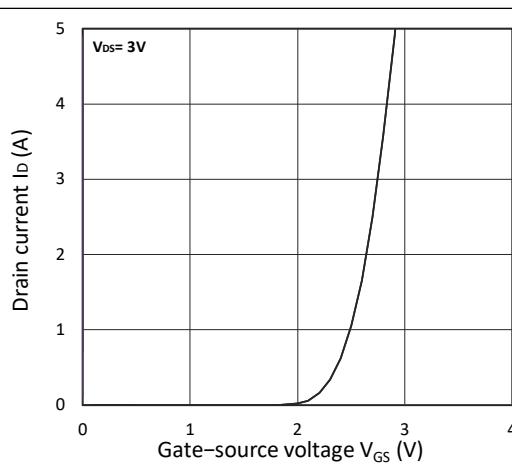


Figure 2. Transfer Characteristics

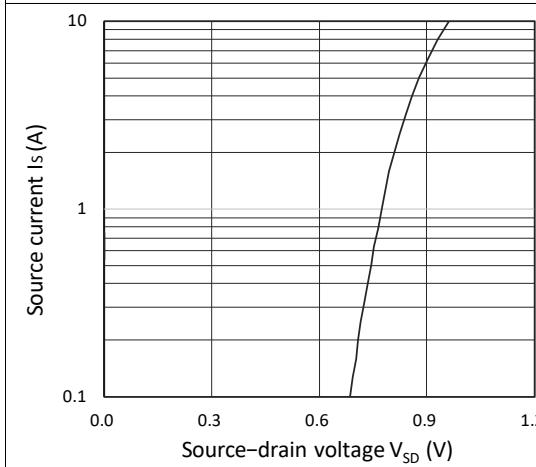
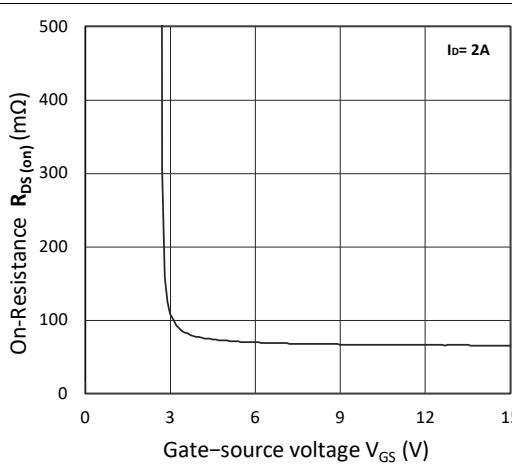
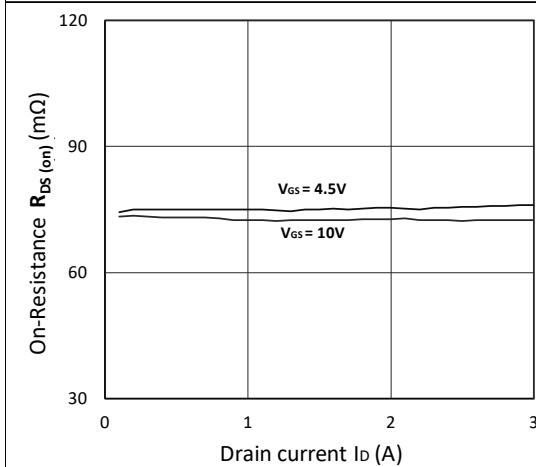
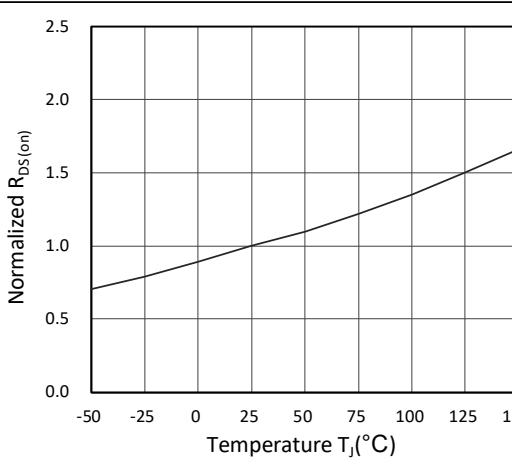


Figure 3. Forward Characteristics of Reverse

Figure 4. $R_{DS(on)}$ vs. V_{GS} Figure 5. $R_{DS(on)}$ vs. I_D Figure 6. Normalized $R_{DS(on)}$ vs. Temperature

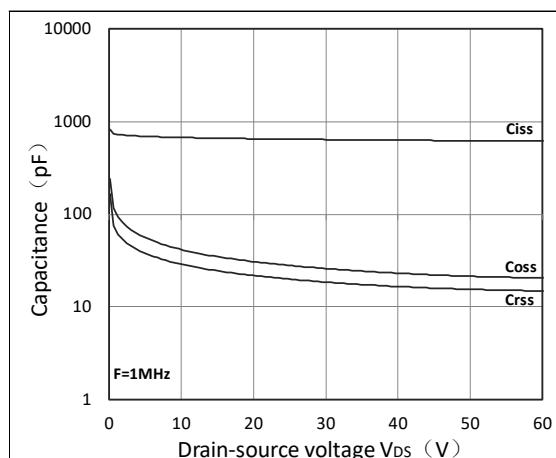


Figure 7. Capacitance Characteristics

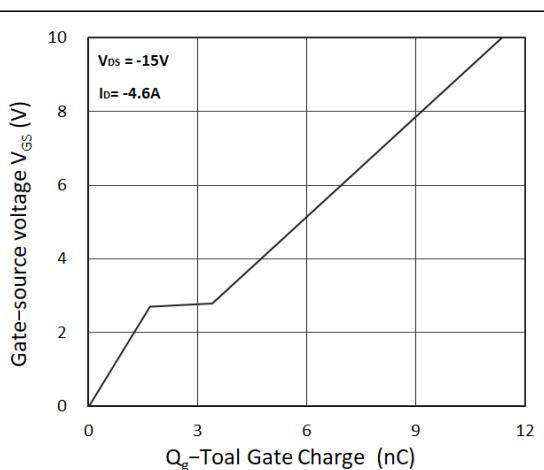


Figure 8. Gate Charge Characteristics

Outline Drawing – SOT-23

PACKAGE OUTLINE																																														
			<table border="1"> <thead> <tr> <th colspan="3">DIMENSIONS</th> </tr> <tr> <th>SYMBOL</th> <th>MILLIMETER</th> <th>INCHES</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>MIN 0.90 MAX 1.15</td> <td>MIN 0.035 MAX 0.045</td> </tr> <tr> <td>A1</td> <td>MIN 0.00 MAX 0.10</td> <td>MIN 0.000 MAX 0.004</td> </tr> <tr> <td>b</td> <td>MIN 0.30 MAX 0.50</td> <td>MIN 0.012 MAX 0.020</td> </tr> <tr> <td>c</td> <td>MIN 0.08 MAX 0.15</td> <td>MIN 0.003 MAX 0.006</td> </tr> <tr> <td>D</td> <td>MIN 2.80 MAX 3.00</td> <td>MIN 0.110 MAX 0.118</td> </tr> <tr> <td>E</td> <td>MIN 2.25 MAX 2.55</td> <td>MIN 0.089 MAX 0.100</td> </tr> <tr> <td>E1</td> <td>MIN 1.20 MAX 1.40</td> <td>MIN 0.047 MAX 0.055</td> </tr> <tr> <td>e</td> <td colspan="2">0.95 BSC</td></tr> <tr> <td>e1</td> <td>MIN 1.80 MAX 2.00</td> <td>MIN 0.071 MAX 0.079</td> </tr> <tr> <td>L</td> <td colspan="2">0.55REF</td></tr> <tr> <td>L1</td> <td>MIN 0.30 MAX 0.50</td> <td>MIN 0.012 MAX 0.020</td> </tr> <tr> <td>θ</td> <td>MIN 0° MAX 8°</td> <td>MIN 0° MAX 8°</td> </tr> </tbody> </table>		DIMENSIONS			SYMBOL	MILLIMETER	INCHES	A	MIN 0.90 MAX 1.15	MIN 0.035 MAX 0.045	A1	MIN 0.00 MAX 0.10	MIN 0.000 MAX 0.004	b	MIN 0.30 MAX 0.50	MIN 0.012 MAX 0.020	c	MIN 0.08 MAX 0.15	MIN 0.003 MAX 0.006	D	MIN 2.80 MAX 3.00	MIN 0.110 MAX 0.118	E	MIN 2.25 MAX 2.55	MIN 0.089 MAX 0.100	E1	MIN 1.20 MAX 1.40	MIN 0.047 MAX 0.055	e	0.95 BSC		e1	MIN 1.80 MAX 2.00	MIN 0.071 MAX 0.079	L	0.55REF		L1	MIN 0.30 MAX 0.50	MIN 0.012 MAX 0.020	θ	MIN 0° MAX 8°	MIN 0° MAX 8°
DIMENSIONS																																														
SYMBOL	MILLIMETER	INCHES																																												
A	MIN 0.90 MAX 1.15	MIN 0.035 MAX 0.045																																												
A1	MIN 0.00 MAX 0.10	MIN 0.000 MAX 0.004																																												
b	MIN 0.30 MAX 0.50	MIN 0.012 MAX 0.020																																												
c	MIN 0.08 MAX 0.15	MIN 0.003 MAX 0.006																																												
D	MIN 2.80 MAX 3.00	MIN 0.110 MAX 0.118																																												
E	MIN 2.25 MAX 2.55	MIN 0.089 MAX 0.100																																												
E1	MIN 1.20 MAX 1.40	MIN 0.047 MAX 0.055																																												
e	0.95 BSC																																													
e1	MIN 1.80 MAX 2.00	MIN 0.071 MAX 0.079																																												
L	0.55REF																																													
L1	MIN 0.30 MAX 0.50	MIN 0.012 MAX 0.020																																												
θ	MIN 0° MAX 8°	MIN 0° MAX 8°																																												
Notes																																														
<p>1. Dimensioning and tolerances per ANSI Y14.5M, 1985.</p> <p>2. Controlling Dimension: Inches</p> <p>3. Pin 3 is the cathode (Unidirectional Only).</p> <p>4. Dimensions are exclusive of mold flash and metal burrs.</p>																																														

Marking Codes

Part Number	WM06N30MS
Marking Code	

Package Information

Qty: 3k/Reel

CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207

Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.comWAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

WAYON ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.